

데이터시트

# SCG-5632 | 32-Port RS232 Console Server



## Overview


SCG-5632는 32개의 RS232포트가 탑재된 산업용 콘솔 서버입니다.

사용자는 이 제품의 RS232포트에 연결된 시리얼 통신 장치를 원격으로 접근할 수 있습니다.

## Features

- 멀티 RS232 포트 탑재: 32
- 콘솔 및 GUI 설정 지원
- COM 포트 스캔 기능 지원
- ACL 기능 지원
- 일괄 설정 기능 지원

## Application

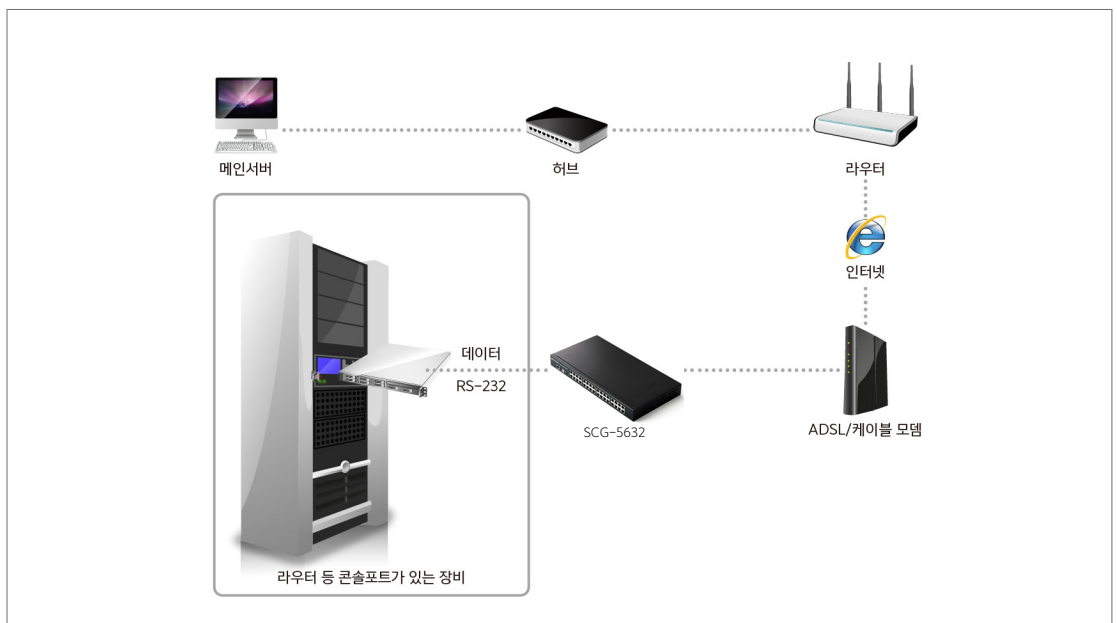

# Specifications

Serial Physical Interface	
Serial Interface	RS232 – RXD, TXD, RTS, CTS, DTR, DSR, GND
Connector	8-pin RJ45
Serial Port Property	
Baudrate	2,400 ~ 115,200 bps
Data Bits	8bits, 7bits with Parity
Parity	None, Even, Odd, Mark, Space
Stop Bit	1, 2
Flow Control	None, RTS/CTS
Network Physical Interface	
Wired LAN	10Base-T/100Base-TX Ethernet (RJ45)
	Ethernet Speed Auto Sense
	1:1 or Cross-over Cable Auto Sense
Software Functions	
Protocols	TCP, IP, TLS, SSH, ICMP, ARP, TELNET, DHCP, mDNS
Security	Password for Configuring
Additional	ACL, COM port scan
Indicators	
LED	PWR, STS, TXD, RXD
Management	
spFinder	Configuration Tool for Windows
Dimension	
Size	437mm x 228mm x 44mm
Weight	about 2.7Kg
Operating Environments	
Input Voltage	AC 90V ~ 264V
Protection	Reverse Voltage Protection / Surge Protection
Current Consumption	typically, 22W
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-20°C ~ +60°C
Operating Environments	
KC	Registration (KN 22, KN 24)